



TimeQ+ Biometric Connectivity Diagrams

1) RS232 Direct (30 ft. Cable)

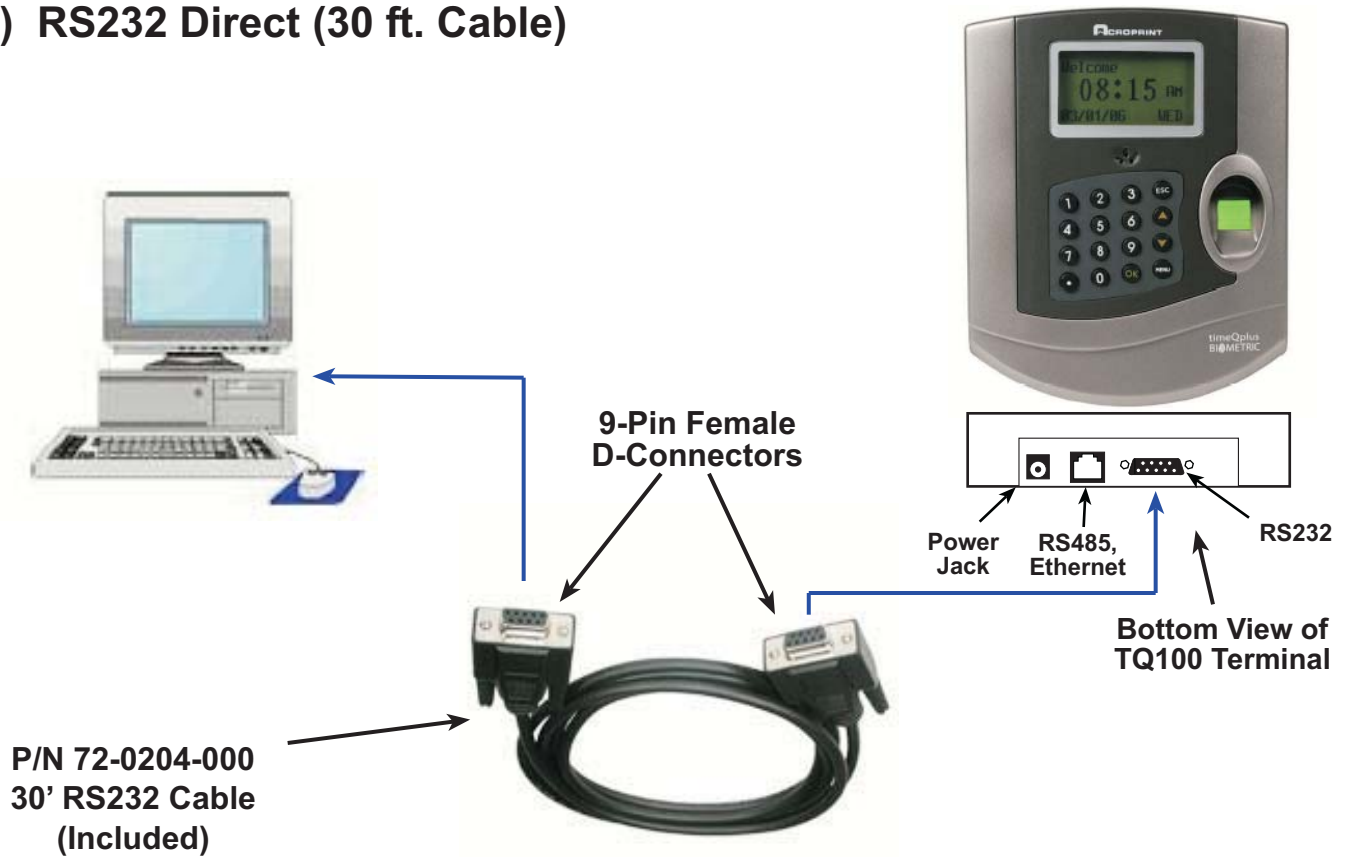


2) RS232 Direct (100 ft. Cable)

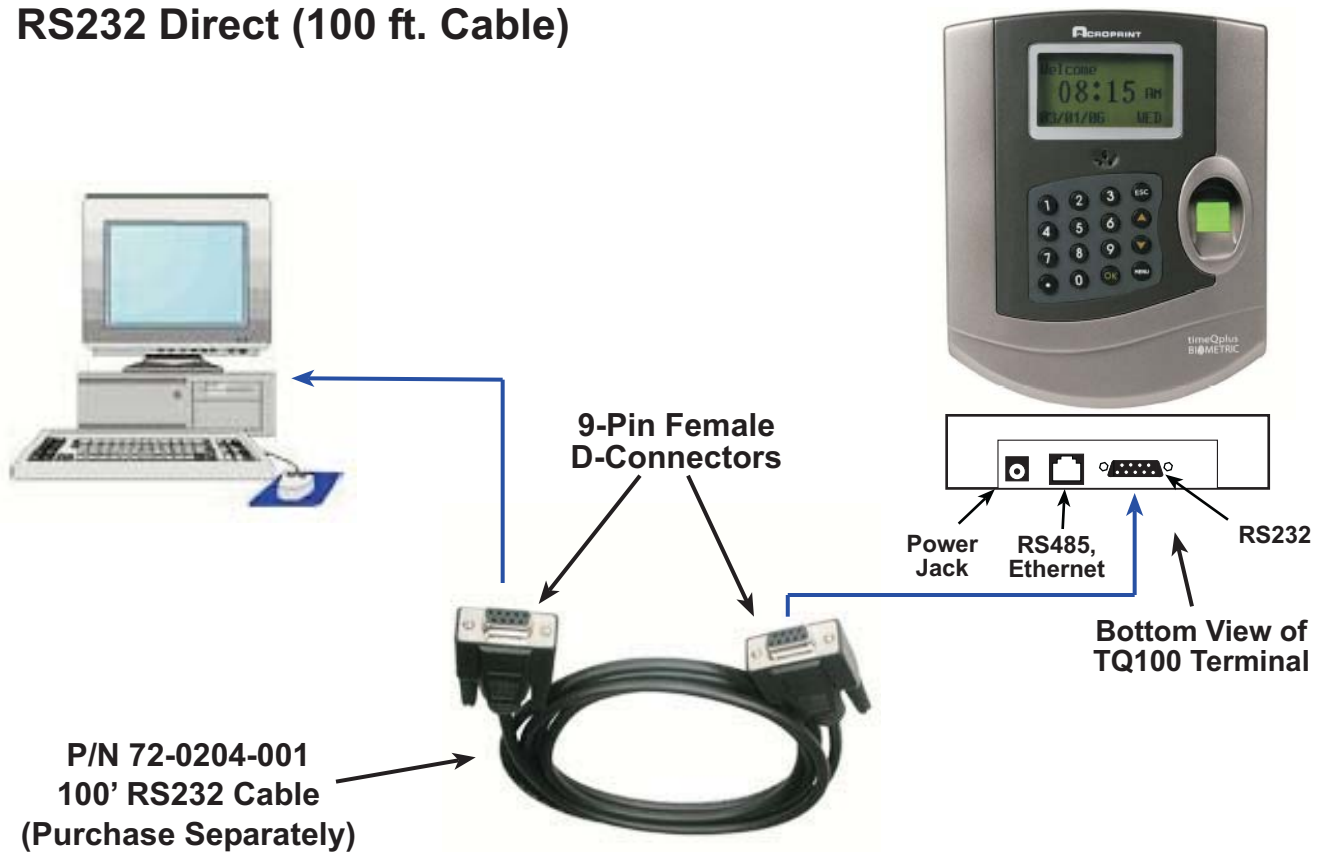


TimeQ+ Biometric Connectivity Diagrams

3) USB to RS232 Direct (30 ft. Cable)

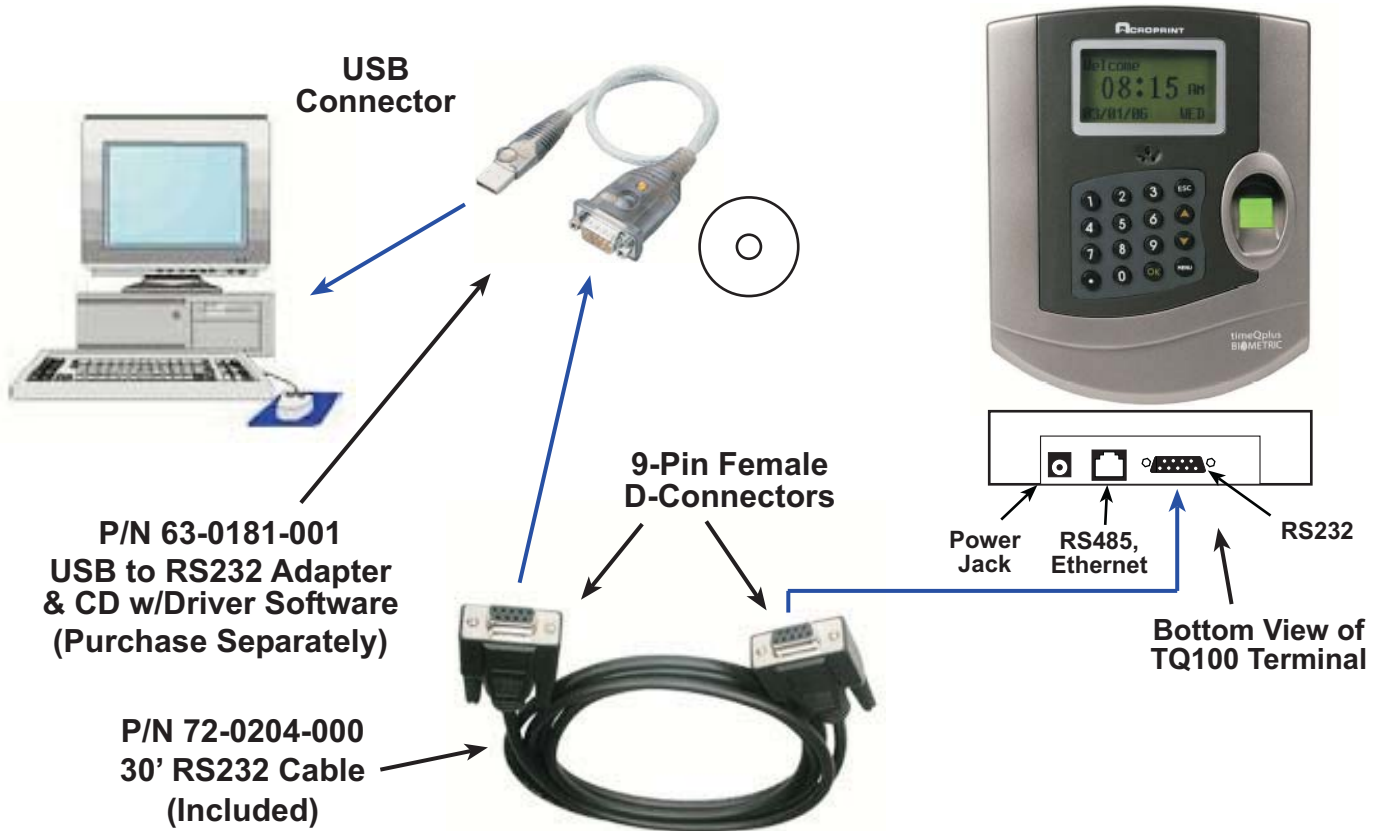


4) USB to RS232 Direct (100 ft. Cable)

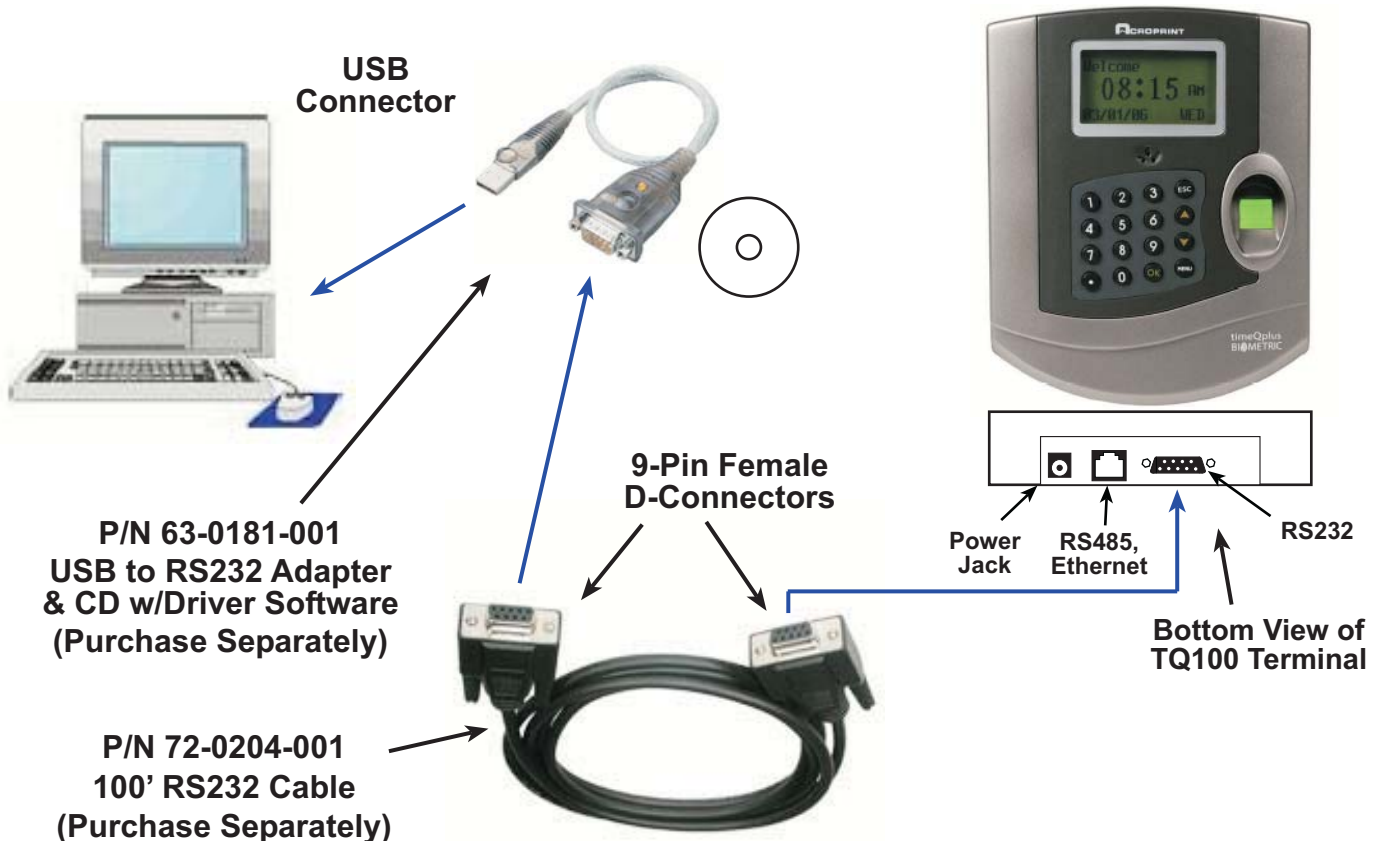


TimeQ+ Biometric Connectivity Diagrams

5) Ethernet Direct (325 ft. Max. Distance)

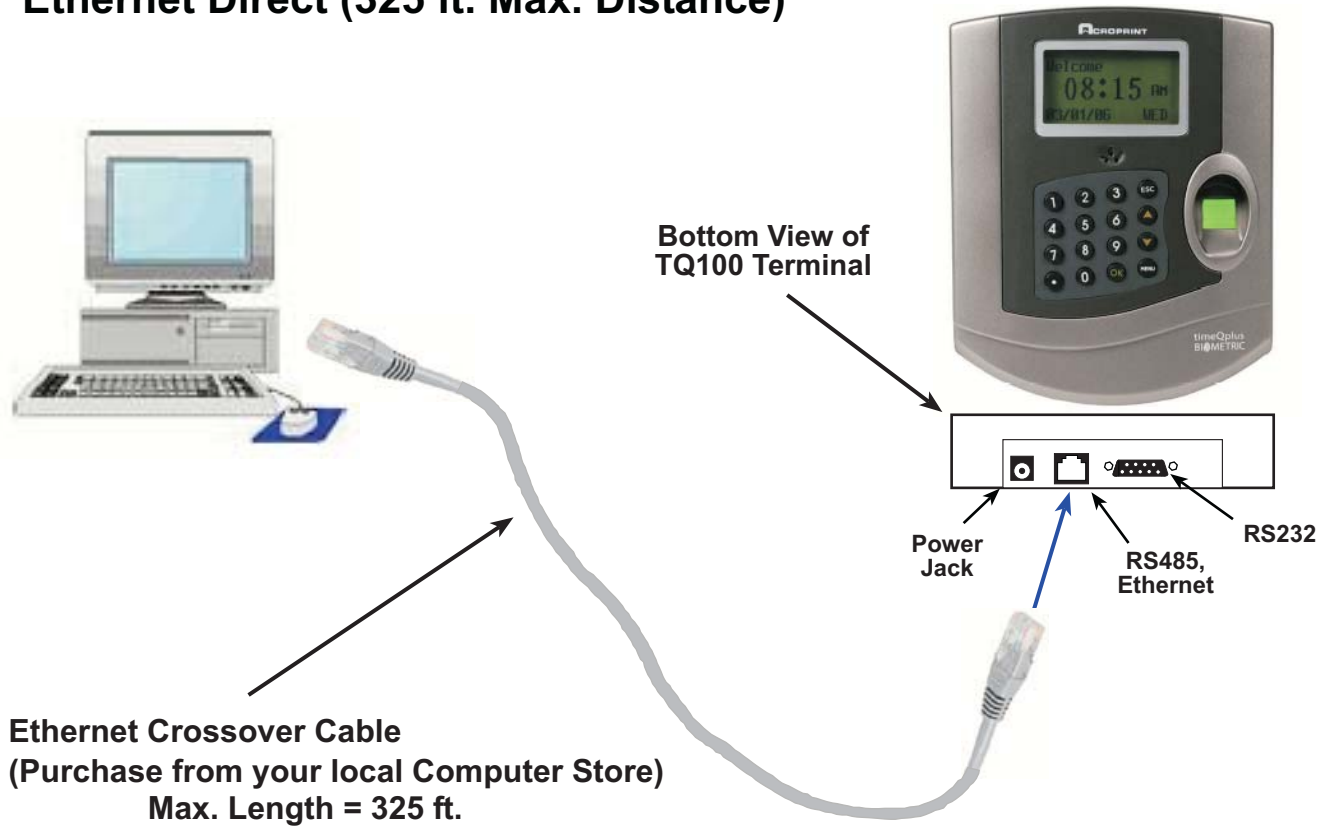


6) Connection to an Existing Ethernet Network (325 ft. Max. Distance)

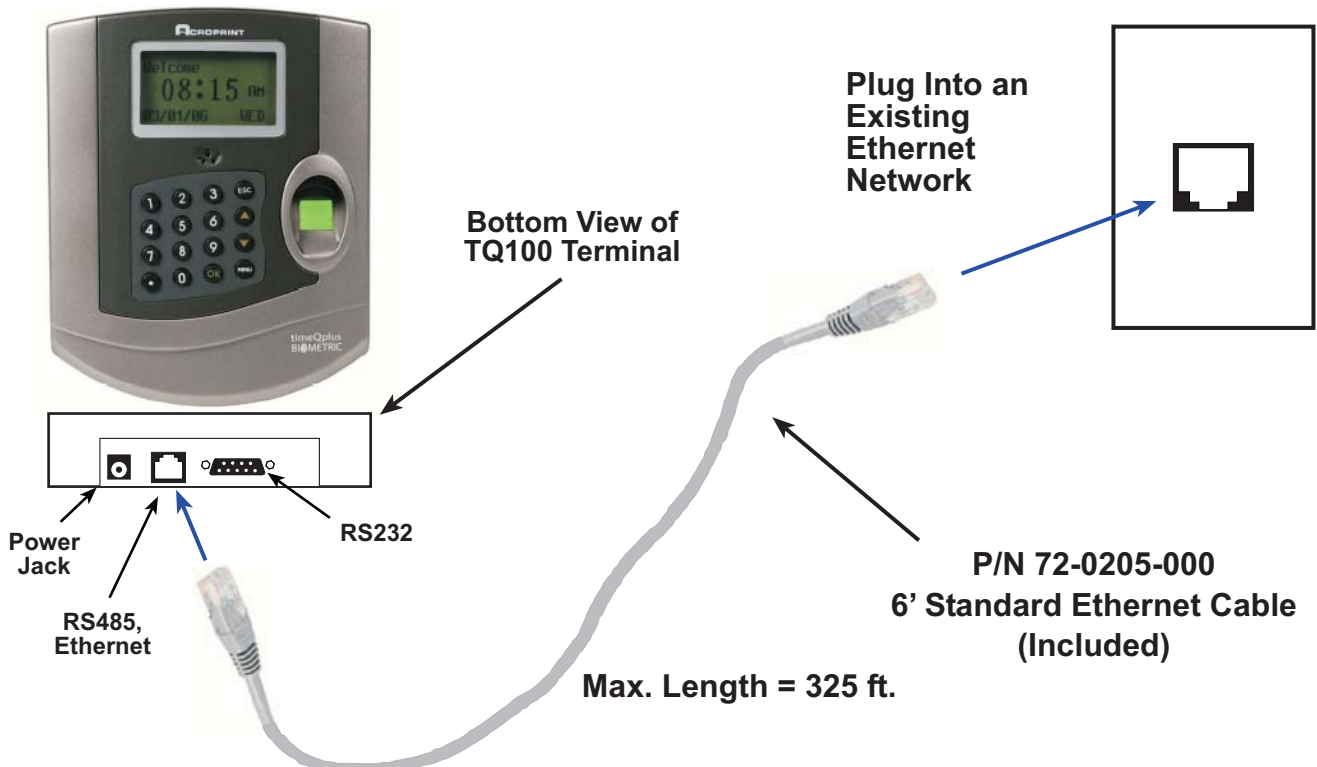

TimeQ+ Biometric Connectivity Diagrams

7) RS232 to RS485 Network (1000 ft. Distance Max)

(Recommend 10 Terminals Max for Optimal Performance)

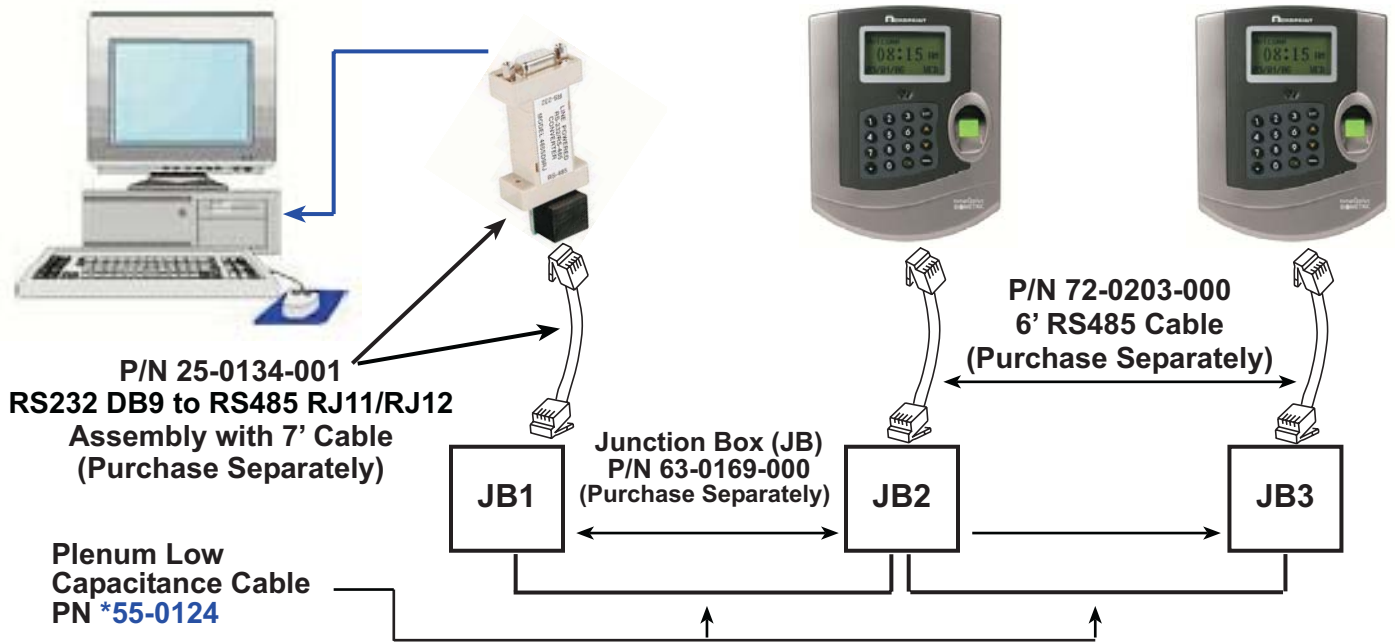

*Note: 55-0124 available in 100', 300', 500' & 1000' lengths or per/ft custom lengths

8) USB to RS485 Network (1000 ft. Distance Max)

(Recommend 10 Terminals Max for Optimal Performance)

