
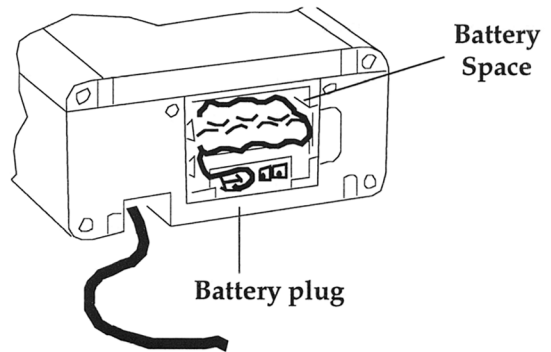


INSTALLING

FULL OPERATION BATTERY (OPTION)

MODEL 420


1. Open battery door on the bottom of the case.
2. Connect battery female plug to male plug.
3. Carefully place battery in place provided.
4. Close battery door.

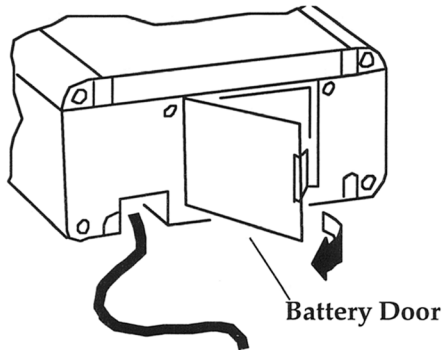

MODEL 175 / MODEL 310

(LEAVE UNIT PLUGGED IN DURING BATTERY PACK INSTALLATION.)

1. Remove top case.
2. Connect battery female plug to male plug.
3. Place battery on battery shelf.
4. Replace top case.

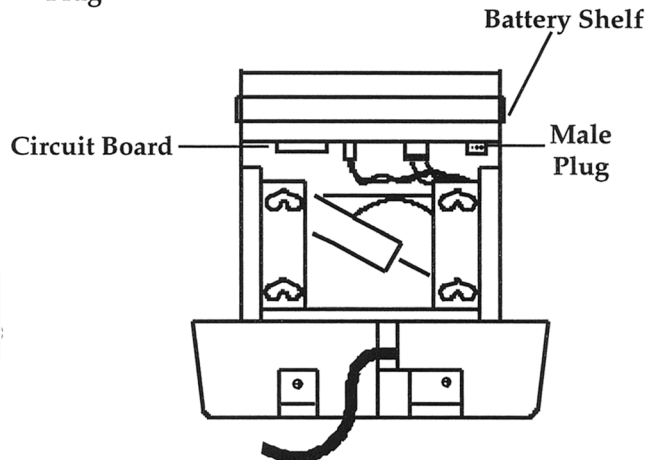

5640 Departure Drive
Raleigh, NC 27616 U.S.A.
IN USA 800.334.7190
Tel: 919.872.5800
Fax: 919.850.0720
Email: sales@acroprint.com